

Oil-free lobe blowers

ZL 2 & ZL 2 VSD (15-45 kW / 20-60 hp)

Atlas Copco





High process uptime at low capital costs

When starting-up your air blower application, capital costs, maintenance costs and reliability are very important. The simplicity and proven design of our lobe blowers make them the perfect match for installations in harsh environments all over the world with limited need for supervision. By providing just the right amount of air requested by your application, the VSD units with integrated controller contribute to your smooth and cost effective operation.

Durable and reliable source of oil-free air

Operation in high-ambient temperature environment or at high-altitude is not an issue for ZL blowers. The cooling system and integrated safety and start-up valve contribute to trouble-free operation during the lifetime of the blower.

User friendly operation - closely monitored

Integrated VSD controller with Elektronikon® Mk5 panel provides user-friendly operation and total observance of blower condition.



The right product for the widest range of applications

The positive displacement principle with fix characteristics makes the product suitable for tons of applications. Whether it is pneumatic transport of granulates, fluidization of silos, aeration process in waste water treatment plants or process air in chemical plants; the ZL blowers bring reliable, uninterrupted operation around the clock.



— Wastewater treatment plants

Source of reliable compressed air where you need it

The reliable design of ZL blowers makes it possible to install them where you need them, i.e. close to the technology, even outdoors. No need for a dedicated blower room, the ZL blower drives the capital costs for the whole WWTP down. Easy maintenance in regular intervals gives you ease-of-mind for the total plants' lifetime.

— Cement Industry

Reliable air supply in dusty environment

Whether you need a blower for pneumatic transport of solid fuel, for main combustion air or for lance cooling air, the ZL unit is strong enough to cope with these demands. Though the environment in cement plant is often harsh and dusty, the ZL lobe blower's proven element with sturdy frame will provide trouble-free operation.





— Food and Beverage

Quality of product is key

In the Food and Beverage industry, it is crucial to keep the quality of the product high ensuring no contamination from foreign particles or unfit materials. The Food certificate ensures that all ZL blower parts are suitable for use in this industry.


— Power

Smooth and reliable operation 24/7

Applications in power plants such as desulphurization or combustion process require intermittent operation of the blower with variable air demand. A high number of starts can be very demanding for the bearings in element and motor and for the check valve. The start-up function of the (standard-built-in) PVO valve ensures a smooth pressure build-up and thus prolongs the lifetime of those components . The integrated VSD control of the ZL blower then provides always the right volume of air.



ZL 2 - Simple and Reliable

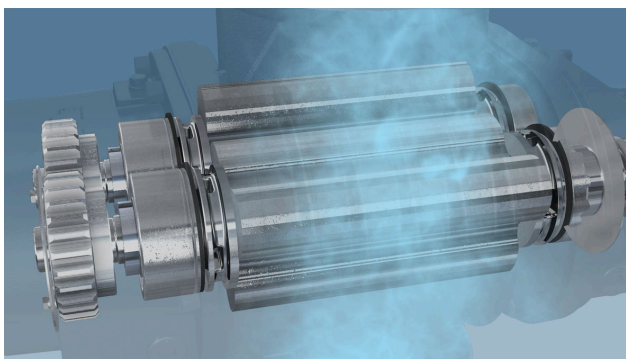

1. Traditional design - reliable blower

Tri-lobe blower element with traditionally selected strong bearing and gear set



2. Cool canopy

Forced ventilation flow keeps the internal temperature of the canopy close to ambient temperature, contributing to the reliability of the unit. Option for outdoor version to use in conditions of -10 / + 55 °C

3. Durable outlet connection

Integrated compensator with flange provides structural decoupling and installation alignment. Its stainless steel material brings a long lasting solution

4. Immediate and understandable visual control of blower condition

The mechanical pressure and differential pressure gauges provide easy-to-read information about the outlet pressure and air filter condition.


5. Perfect protection of the unit

The safety and start-up function is integrated into our PVO valve, ensuring that pressure is always under control and that each blower start is smooth, contributing to trouble-free operation.

6. Maintenance free belt tensioning

The automatic belt tensioning done by motor weight eliminates belt creeping and keeps the transmission efficiency high for the whole belt lifetime.

ZL 2 VSD - Compact and Complete

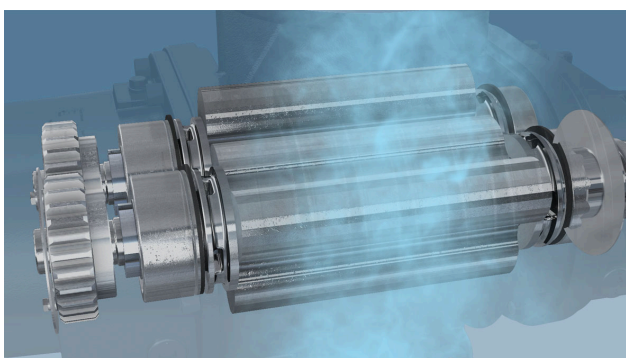

1. Traditional design - reliable blower

Tri-lobe blower element with traditionally selected strong bearing and gear set.



2. Cool canopy

Forced ventilation flow keeps the internal temperature of the canopy close to ambient temperature, contributing to the reliability of the unit. Option for outdoor version to use in conditions of -10 / + 55 °C

3. Durable outlet connection

Integrated compensator with flange provides structural decoupling and installation alignment. Its stainless steel material equals long lasting solution.

4. User friendly operation and installation

The VSD unit with integrated controller and frequency converter comes as plug-and-play package.

5. Superior protection of the unit

Pressure and temperature are constantly monitored through installed sensors. The safety and start-up function is integrated into our PVO valve, ensuring that pressure is always under control and that each blower start is smooth, contributing to trouble-free operation.


6. Maintenance free belt tensioning

The automatic belt tensioning done by motor weight eliminates belt creeping and keeps the transmission efficiency high for the whole belt lifetime.

Flowchart

Process flow and cooling flow - step by step.


ZL

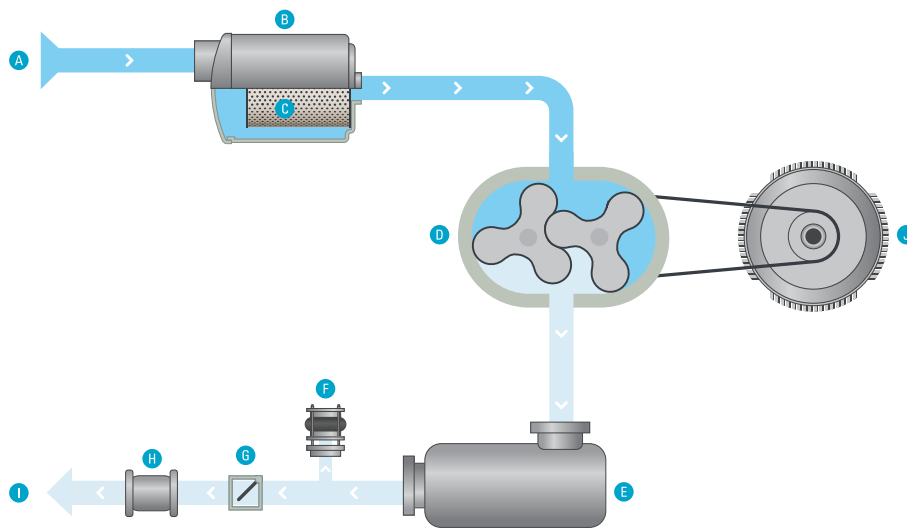

Atlas Copco

- A Air inlet
- B Intake silencer
- C Intake filter
- D Oil free lobe blower element
- E Pulsation damper
- F Start-up & safety valve
- G Check valve
- H Compensator
- I Air out
- J Motor

- Dry compressed air
- Air

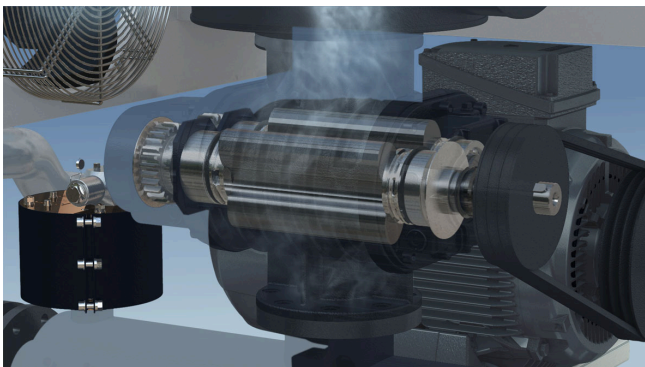


Process flow

- A fan forces fresh process and ventilation air in the canopy, through a noise attenuating baffle system.
- Air is filtered prior to entering the lobe blower element. The filter housing reduces the inlet pulsations.
- The lobe blower element moves air from inlet to outlet.
- Discharge silencer reduces the pressure pulsation levels to the minimum.
- At start-up, the blow-off valve is 'open' for smooth unit start-up. That valve closes itself, pushed by the increased air pressure.
- As soon as the blow-off valve is closed, air pressure increases further, resulting in enough force to push the check-valve open.
- Air delivery to the system.

Cooling flow

- A fan forces fresh process and ventilation air in the canopy, through a noise attenuating baffle system.
- Cubicle ventilation air is mixed with the canopy ventilation air.
- The motor cooling fan circulates this fresh canopy air over the motor housing. The motor fan-cowl ensures that air flowing over the motor cooling fins.
- The forced ventilation flow through the canopy removes the heat radiated by the blower core.
- The hot canopy air can leave the canopy through a grating at the side panel.
- The hot air blown out by the startup and safety valve is ducted straight out of the canopy to avoid canopy heating.

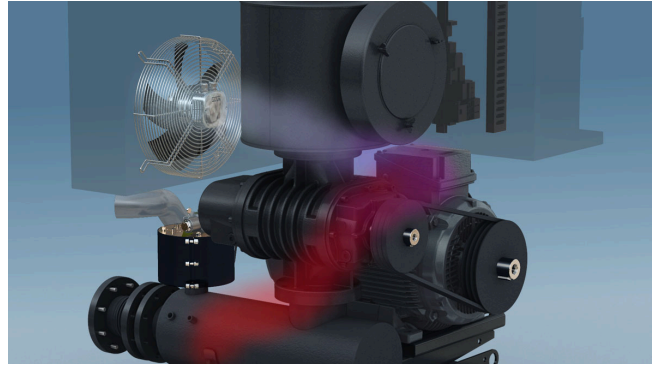

Monitoring and control: how to get the best out of your installation?

The Elektronikon® unit controller is specially designed to maximize the performance of your blowers under a variety of conditions. Optimizer 4.0 takes charge of the management of your full blower room. Key benefits are increased energy-efficiency by lowering energy consumption, reduced maintenance times and less stress... less stress for both you and your entire air system.



Elektronikon® MK5 - Intelligence is part of the package

The full color display gives you an easy-to-understand readout of the equipment's running conditions.

- Clear icons and intuitive navigation provides you fast access to all of the important settings and data.
- Monitoring of the equipment running conditions and maintenance status; bringing this information to your attention when needed.
- Operation of the equipment to deliver specifically and reliably to your compressed air needs.
- Built-in remote control- and notification functions provided as standard, including simple to use integrated webpage.
- Support for 31 different languages, including character based languages.

Connectivity, with SMARTLINK

Monitor your machines over the ethernet with the Elektronikon® unit controller and the **SMARTLINK** service. Monitoring features include warning indications, blower shut-down, sensor trending and maintenance scheduling. Go for energy efficiency: customized reports will be generated on the energy efficiency of your blower room, in compliance with ISO 50001.





Sit back and relax, Optimizer 4.0 has it under control

A properly managed compressed air network will save energy, reduce maintenance, decrease downtime, increase production and improve product quality. Atlas Copco's Optimizer 4.0 monitors and controls multiple blowers simultaneously; it is one central point of control for the whole compressed air network, ensuring all blowers provide optimum performance for your process. The result is a completely autonomous and energy-efficient network, giving you peace of mind and keeping your costs minimized.



Maximize your resources with a Service Plan

Properly caring for your air compressor helps you lower your operating costs and minimises the risk for unplanned breakdowns or production stops. Atlas Copco offers energy efficiency checks, service, repairs, spare parts and maintenance plans for all air compressors.

Entrust your servicing to our expert professionals and ensure your business continues to run efficiently. Our plans cover repairs, preventative maintenance, spare parts, and more.

Reduce your total cost of ownership and benefit from optimal performance

- Save costs - Optimal maintenance will reduce the operational cost of your blower system.
- Increase operational efficiency - Our maintenance expertise makes life easier when it comes to resource management.
- High uptime and performance - Specialist service keeps your equipment running as it should, protecting your investment.



Blower parts at your doorstep: our Parts Plan

Genuine Parts, designed and produced to the exact specifications of your blower, delivered right where and when you need them.

- All parts, one package - Always have the needed part for your service intervention at hand.
- Save money - A Service Kit costs less than the sum of its components if ordered separately.
- Less administration - Every Service Kit has a single part number, allowing you to create a simple purchase order that is easy to follow up.

Fixed Price Services: best blower parts & maintenance

Avoid financial surprises. Our Fixed Price Services combine the expertise of factory-trained technicians with the quality of our genuine blower parts.

- The best blower parts - The unrivalled quality of our genuine parts results in optimal uptime, energy consumption and reliability.
- Clear and easy - Service tailored to your installation, site conditions, and production planning, every Fixed Price Service has a clear scope and price.





Preventive Maintenance Plan for optimal blower uptime

Rely on trained Atlas Copco technicians and the unrivalled quality of our genuine parts.

- Service reports - We help you achieve maximum energy efficiency by keeping you up to date of the status of your system.
- Prevent breakdown - If our technicians spot an additional developing problem, they will propose a solution.
- Top-priority emergency call out system - If an urgent repair is needed, you get priority assistance.



Scope of Supply

		ZL 2 VSD	ZL 2		
Air circuit	Air inlet filter	✓	✓		
	Inlet pulsation damper	✓	✓		
	Oil-free lobe element	✓	✓		
	Start-up/Safety valve	✓	✓		
	Check valve	✓	✓		
	Discharge pulsation damper	✓	✓		
	Outlet compensator (Stainless Steel)	✓	✓		
	Outlet air flange DIN or ANSI	✓	✓		
Oil circuit	Supplied oil-filled	✓	✓		
	Splash lubricated element bearings & gears	✓	✓		
Motor	IE3 induction motor, TEFC IP55	✓	✓		
Mechanical	Pulley & Belt	✓	✓		
	Automatic belt tensioning system	✓	✓		
Bodywork	Sound attenuating canopy	✓	✓		
	Package vibration isolators	✓	✓		
to be selected:		Mechanical	Elektronikon®	Mechanical	Elektronikon®
Monitor & Control	Pressure gauge and filter indicator	✓	-	✓	-
	Elektronikon® controller	-	✓	-	✓
	VSD inverter, EMC- and RFI filter, TT/TN net	-	✓ / -	-	-
	Y/D starter	-	-	-	✓ / -
	Sensors discharge pressure & temperature	-	✓	-	✓
	SMARTLINK	-	✓	-	✓
	Flow control via 4 - 20 mA (external source)	-	✓	-	-
	LAN or Internet control/monitoring	-	✓	-	✓

✓: Standard -: Not available

Scope of supply

Configure the lobe blower to your needs: Variable Speed or Fixed Speed? With integrated controller or not? With or without starter? Standard or Customized?




Optional controller

Our scope of supply starts with a purely mechanical blower package; at the front panel you find mechanical gauges indicating discharge pressure and inlet filter condition. You can upgrade your package by selecting our Elektronikon® controller, providing constant monitoring of blower health, giving feedback to your process controller and enabling connectivity to e.g. an Optimizer 4.0 module managing your blower room. For units with integrated Fixed Speed or Variable Speed starter, this controller is the 'standard' scope of supply.

No-starter variant

You have the freedom to select a no-starter variant if you feel more comfortable with your own starter cubicle or if you prefer to have it installed in a separate room.

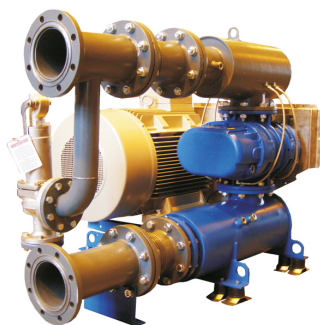

Special requests – custom design!

Our standard scope of supply may be just 'too' standard for you; you may have particular needs or preferences. Our Systems-department can bend the rules! Do you just require our unit in a different color? Or do you want us to start from scratch and build a blower to your specs? We can do it all!

Options

	ZL 2 VSD	ZL 2
Test Certificate	✓	✓
Wooden Case packing	✓	✓
Full Option Motor (anti-cond. heaters & PTC)	✓	✓
Outdoor canopy	(if no starter) ✓	✓
Separate air intake	✓	✓
IT net	✓	✓
Belt guard	✓	✓

Selectable options

✓: Standard



Answers to your wishes

A wide range of options is available to satisfy your needs for technical solutions as well as for documentation.



Full option motor

Anti-condensation heaters and (three) PTC thermistors are installed in the main motor monitoring the winding temperatures. The relevant temperatures are shown on the Elektronikon® display and alarms and shutdowns are programmed to protect the blower motor.



Performance Test Certificate

Every blower that leaves our factory is tested following the Atlas Copco standard test procedure in accordance to the ISO 1217:2009, annex "C" and "E" (4th edition). As option we can share a complete Performance Test report of your blower.



Outdoor canopy

Canopy extension protecting it from water entering into the unit.
No need for a dedicated blower room anymore, install the blowers at the most convenient location!

Technical specifications

ZL 2 & ZL 2 VSD

TYPE	Working pressure		Max Capacity FAD (1)		Noise level (2)	Installed motor power		Weight		Dimensions L x W x H	
	mbar(g)	psig	m ³ /hr	cfm	dB(A)	kW	hp	kg	lb	mm	in
ZL 2 & ZL 2 VSD 11 kW	300	4.4	840	1425	70	11	15	600	1320	1150 x 1000 x 1430	45 x 40 x 56
ZL 2 & ZL 2 VSD 15 kW	300	4.4	1215	2065	73	15	20	600	1320		
	400	5.8	825	1400	70			600	1320		
ZL 2 & ZL 2 VSD 18 kW	300	4.4	1390	2360	76	18	25	675	1485		
	400	5.8	1205	2045	73			600	1320		
	500	7.3	815	1385	71			600	1320		
ZL 2 & ZL 2 VSD 22 kW	400	5.8	1375	2335	76	22	30	700	1540		
	500	7.3	1200	2040	74			615	1355		
	600	8.7	810	1375	71			615	1355		
ZL 2 & ZL 2 VSD 30 kW	500	7.3	1365	2320	76	30	40	715	1575		
	600	8.7	1190	2020	74			635	1400		
	700	10.2	805	1370	71			635	1400		
ZL 2 & ZL 2 VSD 37 kW	600	8.7	1355	2300	77	37	50	735	1615		
	700	10.2	1185	2015	74			655	1440		
	800	11.6	1100	1870	74			655	1440		
	900	13.1	965	1640	74			655	1440		
	1000	14.5	845	1435	73			655	1440		
ZL 2 & ZL 2 VSD 45 kW	700	10.2	1345	2285	77	45	60	775	1705		
	800	11.6	1335	2270	77			775	1705		
	900	13.1	1240	2105	77			775	1705		
	1000	14.5	1090	1850	75			700	1540		

(1) Unit performance measured according to ISO 1217, Annex C & E, Edition 4 (2009)

Reference conditions:

- Absolute inlet pressure 1 bar (14.5 psi).
- Intake air temperature 20°C (68°F).

(2) A-weighted emission sound pressure level at the work station, L_p WSA (re 20 µPa) dB (with uncertainty 3 dB).
Values determined according to noise level test code ISO 2151 and noise measurement standard ISO 9614.

A blank sheet of lined paper with 23 horizontal lines spaced evenly down the page.

COMMITTED TO SUSTAINABLE PRODUCTIVITY

We stand by our responsibilities towards our customers, towards the environment and the people around us. We make performance stand the test of time. This is what we call – Sustainable Productivity.

