
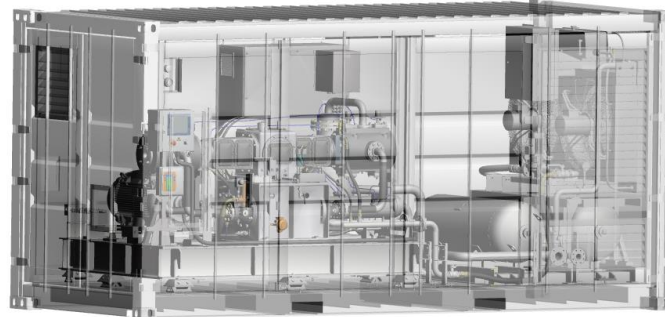


BOOSTER OF 948CFM 650 PSI

*High-Pressure Oil-Free Booster
(Electric-Driven)*

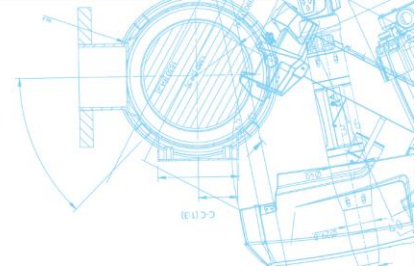

General Specification

Capacity	660-948cfm / 18.5-26.5m ³ /min
Overall length	20' / 609 cm
Overall width	8' / 244 cm
Overall height	8' 6" / 256 cm
Shipping weight	30,000 lb / 14,000 kg
Suction pressure	100-145 psig / 7-10 barg
Discharge pressure	360-650 psig / 26-45 barg
Motor Power Rated	168 Hp/ 125 Kw
Load Current	208 amp
Voltage/ Ph/ Frequency	480v/ 3ph/ 60hz
Sound/ inlet dew point	80 dB(A)/ -4°F (-20°C) PDP

Features

Suitable for compressed air and nitrogen applications
Class Zero
Reliable piston technology
All weather enclosure (-4°F to 104°F / -20°C to +40°C)
Modular and easy control & monitoring
Automatic high temperature/pressure shutdown system

Optional Accessories

Air Compressors	Nitrogen Generators	Air Accessories	Miscellaneous
Clean, dry feed air	Produce on-site	Air receivers	Trailers
	Nitrogen gas from	Air heaters	Fuel tank
Dryers	95% to 99.5% purity	After-coolers	Operator
Eliminate condensation		Filters	
		Hoses	
		Manifolds	

Version: North America – 26/06/2019



Atlas Copco Rental

www.atlascopcorental.com
 rental.usa@atlascopco.com – 800-736-8267
 Subject to change without prior notice. Information is for guidance only. Please contact your nearest
 Rental office for detailed application advice.

