

Scabblers and Backfill Tampers

Ergonomic, Reliable and Powerful



People.
Passion.
Performance.



Chicago
Pneumatic

SCABLERS

Equipped with tungsten carbide tipped pistons, our scabblers offer you the power you need, in a lightweight and compact package. All scabblers have three pistons mounted in line of which the cycling occurs due to the air porting arrangements in the piston assembly.

Applications

- Concrete cleaning and roughening
- Keying the surface of construction joints
- Produce ornamental or contrasting finishes on concrete surfaces



Lightweight & compact



Easy to use

Key features

- Back head grip, gives in-line thrust
- Chamfered cylinder block increases visibility to the work surface



High productivity



Durable




CP 0006

Ideal for work on large surfaces




CP 0006 SVR

Extra vibro reducing features

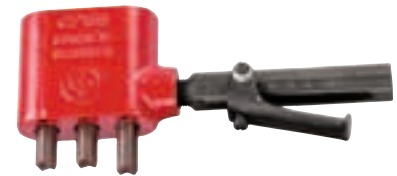

CP 0066

Short, compact tool which allows work in confined spaces

Scabblers		CP 0006	CP 0006 SVR 	CP 0066
Weight	kg	5,5	6,5	4,5
Length	mm	470	470	280
Height	mm	245	275	146
Width	mm	160	160	57
Air consumption	l/s	13	13	11,5
Blows per minute	bpm	3000	3000	3000
Vibration level 3 axes (1S0 28927-9) ¹⁾	m/s ²	23,1	7,1	12,8
Sound pressure level (1S0 11203) ¹⁾	dB (A)	95	95	97
Air inlet		1/2" NPTF	1/2" BSP	1/2" BSP
Part number		8900 0040 04	8900 0040 01	8900 0040 05

(at 6 bar)

¹⁾ 1/2" NPTF also included in delivery

BACKFILL TAMPERS

Looking for the right power to complete contracting operations?

Our backfill tampers get the job done, whether you need a tool to handle light, medium or heavy contracting jobs.

Applications

- Compact soil around foundations and other structures
- Compacting backfill in trenches

Key features

- Maximum power – slow powerful blows efficiently and quickly compact all types of backfill, including clay and soils containing high percentages of finely crushed or powdered material
- Heat-treated cylinder and chrome plated piston significantly extend tool life
- Aluminum butt held with clamp screw for quick, easy replacement
- Exhaust deflector directs air, moisture and oil away from operator
- Integral oiler for continuous lubrication



Lightweight & compact



Easy to use



Well balanced



Durable



Tamper		CP 0003	CP 0004
Weight	kg	13,6	19
Length	mm	1320	1270
Body diameter	mm	22	25
Butt size	mm	127	160
Air consumption	l/s	8,4	13
Blows per minute	bpm	800	780
Air inlet	inch	1/2" NPTF	1/2" NPTF
Vibration level 3 axes (ISO 20643) ¹⁾	m/s ²	32,3	44,8
Sound power level guaranteed (2000/14/EC) ¹⁾	dB (A)	108	109
Sound pressure level (2000/14/EC) ¹⁾	dB (A)	95	94
Sound power uncertainty value K	dB (A)	3	3
Valve type		Simple valve	Ring valve
Bore and stroke	mm	36,5x152	57x152
Part number		8900 0040 06	8900 0040 03

(at 6 bar)

¹⁾ Important: Full details of measurement are available in the Safety and Operating Instructions of the product (part no 9800 0557 90). It can be found on www.cpprintshop.com

Backfill tamper butts			
Diameter (mm)	Material	CP 0003	CP 0004
63,5	Aluminium	-	P138879
127	Aluminium	P089008	-
160	Aluminium	-	P089050
152	Iron	3303 0050 82	-
160	Iron	-	3303 0050 81
Pole butt	Iron	3303 0050 84	3303 0050 83

Auxiliary equipment	Part number
Muffler, CP 0003	P126126
Muffler, CP 0004	P125807

Construction equipment portfolio

Air compressors



Small air

- 2-7 m³/min
- 5.5-12 bar



Medium air

- 7-26 m³/min
- 7-17 bar



Large air

- 16-51 m³/min
- 7-28 bar

Handheld tools



Pneumatic tools

- Breakers (13.5-43.5 kg)
- Hammers (4.3-15.4 kg)
- Rock drills (14.7-29.5 kg)
- Additional air tools



Hydraulic tools

- Hammers and Breaker (12-39 kg)
- Power packs
- Additional hydraulic tools



Motor driven tools

- Breakers (22.5 kg)
- Motor drills (25 kg)
- Tie tampers (22.5 kg)

Generators



- Mobile
- Stationary
- Portable

Light towers



- Diesel LED and MH
- Electric LED

Dewatering pumps



- Surface
- Submersible
- Small package

For more information, please contact your CP partner:

Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty or Product Liability.